

CLINTON



a fisherman's pleasure
... with features that
make things easy

K-753 / 7.5

Compact, Lightweight, Economical
Power for Fishing, Trolling, Hunting. In
Canoes, Sailboats, Dinghies, and as
Auxiliary Power for Large Boats

Clinton air-water cooled light weight fishing motor
 ...no unburned fuel discharged into water... inc

THE DELUXE LINE



9.9

MODEL K-990

(With 6 Gallon Remote Fuel Tank)

Meets requirements for heavy duty usage with minimum maintenance and realistic initial cost. Aluminum block with cast iron cylinder liner.



7.5

MODEL K-752

(3¼ gallon fuel tank)

MODEL K-753

Shown on front cover (6 gallon remote fuel tank)



5

MODEL K-550

(2½ gallon remote fuel tank)

- Up Front Controls
- Air Intake Silencing
- Vibration Isolation
- Safety Instant Kill Switch

- Fuel Recycling
- Quality Assurance
- Twist-Grip Throttle For One Hand Steering & Speed Control

Horsepower – 9.9 H.P.

Type Engine – Single Cyl., 2 Cycle, Air & Water cooled

Displacement – 14.98 Cu. in. (245.52 CC)

Bore and Stroke – 2.797 (2⁵¹/₆₄"), 2.438 (2⁷/₁₆")

Starter – Auto-Rewind manual or Electric Starter

Shift – Mechanical, F-N-R shift lever control (Remote Control Access.)

Transom Adjustment – 4 position adjustable angle brkts. & suspension system: Concentric around drive shaft and isolated by rubber mounts.

Controls – Twist Grip throttle & steering arm control (Remote Control Access.)

Steering – 90° Turn manual (Remote Control Access.)

Carburetion – One barrel adjustable high & low speed jets, manual choke, internal reed valve induction and cross flow charging.

Bearings – Needle bearings all through and ball bearings at P.T.O. end in the powerhead.

Connecting Rod – Steel forging, crankshaft: Alloy Steel Forging Carburized & hardened

Spark Advance – Yes, with waterproof flywheel magneto

Fuel Tank Capacity – Remote 6 gal. tank, 50:1 mix regular auto gas

Propeller Type – 3 blade, 8¼ dia. x 8 Pitch, Alum, rubber cushioned hub. Gear Ratio: 13:22

Cooling & Exhaust Muffling – Air plus water cooling: muffled exhaust through one piece die cast (drive shaft) Housing and lower unit

Weight – 61 lbs.

Shipping Weight – Approx. 70 lbs. depending upon accessory ordered.

Horsepower – 7.5 H.P.

Type Engine – Single Cylinder, 2 Cycle, Air & Water Cooled

Displacement – 8.59 Cu. in. (140.8 CC)

Bore & Stroke – 2½ x 1¾

Starter – Automatic Recoil

Ignition – Magneto-Spark Advance

Transom Adjustment – Finger Control, 5 Position Adjustment Angle

***Shift** – Forward, Neutral, Full Pivot Reverse

Controls – Twist Grip Throttle for High & Low Operation, Choke & Idle Adjust Knob

Steering – 180° Pivot Reverse (K752)

Carburetion – Idle & High Speed Adjustment

Fuel Recycling – Yes, Fuel Mix 50:1

Bearings – Ball at P.T.O., Needle at Magneto, Crank Pin & Wrist Pin

Connecting Rod – Forged Aluminum

Propeller Type – 3 Blade - Shear Pin - Semi-weedless

Cooling & Exhaust Muffling – Water Pump - Spray Mist

Weight – 40 Lbs.

Shipping Weight – 53 Lbs.

*K-753 has forward, neutral, and reverse, 90° Turn Steering

Horsepower – 5 H.P.

Type Engine – Single Cylinder, 2 Cycle, Air & Water Cooled

Displacement – 7.75 Cu. in. (127.0 CC)

Bore & Stroke – 2½ x 1¾

Starter – Automatic Recoil

Ignition – Magneto-Spark Advance

Transom Adjustment – Finger Control, 5 Position Adjustment Angle

Shift – Forward, Neutral, Full Pivot Reverse

Controls – Twist Grip Throttle for High & Low Operation, Choke & Idle Adjust Knob

Steering – 180° Pivot Reverse

Carburetion – Idle & High Speed Adjustment

Fuel Recycling – Yes, Fuel Mix 50:1

Bearings – Ball at P.T.O., Needle at Magneto, Crank Pin & Wrist Pin

Connecting Rod – Forged Aluminum

Propeller Type – 3 Blade, Shear Pin - Semi-Weedless


Cooling & Exhaust Muffling – Water Pump - Spray Mist

Weight – 40 Lbs.

Shipping Weight – 53 Lbs.

motors reduce water pollution with fuel recycling
 increased economy ... greater operating efficiency

THE COMPACTS

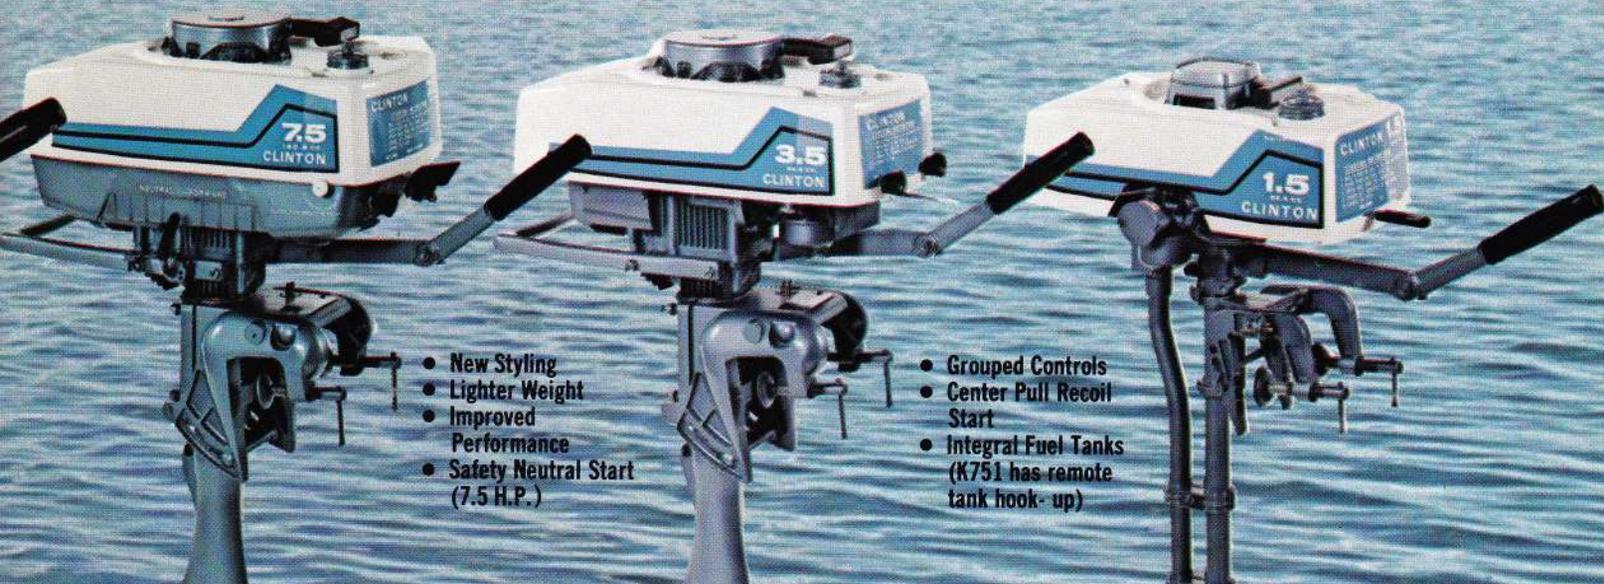

- New Styling
- Lighter Weight
- Improved Performance
- Safety Neutral Start (7.5 H.P.)

- Grouped Controls
- Center Pull Recoil Start
- Integral Fuel Tanks (K751 has remote tank hook-up)

7.5

MODEL K-751

(Integral 1 quart fuel tank with remote tank hook-up)

3.5

MODEL K-350

(Integral 1 quart fuel tank)

1.5

MODEL K-150

(Integral 1 quart fuel tank)

Horsepower – 7.5 H.P.

Type Engine – Single Cylinder, 2 Cycle, Air & Water Cooled

Displacement – 8.59 Cu. in. (140.8 CC)

Bore & Stroke – 2½ x 1¾

Starter – Automatic Recoil

Transom Adjustment – Finger Control, 5 Position Adjustment Angle

Shift – Forward, Neutral

Controls – High & Low Operation, Choke & Idle Adjust Knobs

Steering – 180° Pivot Reverse

Carburetion – One Barrel Float With Idle & High Speed Adjustment

Bearings – Ball at P.T.O., Needle at Magneto, Crank Pin & Wrist Pin

Connecting Rod – Forged Aluminum

Propellor Type – 3 Blade - Shear Pin - Semi-weedless

Cooling & Exhaust – Water Pump - Spray Mist

Fuel Tank Capacity – 1 Quart Integral with Remote Hook Up

Fuel to Oil Ratio – 50:1

Weight – 37 Lbs.

Shipping Weight – 46 Lbs.

Horsepower – 3.5 H.P.

Type Engine – Single Cylinder, Two Cycle, Air-cooled

Displacement – 5.76 Cu. in. (94.5 CC)

Bore & Stroke – 2½ x 1¾

Starter – Automatic Recoil

Transom Adjustment – Finger Control - 5 Position Adjustment Angle

Controls – High & Low Operation, Choke & Idle Adjust Knobs

Steering – 180° Pivot Reverse

Carburetion – Idle & High Speed Adjustment, One Barrel-Float

Bearings – Ball at P.T.O., Needle at Magneto, Crank Pin and Wrist Pin

Connecting Rod – Die Cast Aluminum

Propeller Type – 2 Blade, Shear Pin - Semi-weedless

Cooling & Exhaust Muffling – Water Pump - Spray Mist

Weight – 34 Lbs.

Shipping Weight – 43 Lbs.

Horsepower – 1.5 H.P.

Type Engine – Single Cylinder, Two cycle, Air-cooled

Displacement – 2.0 Cu. in. (32.8 CC)

Bore & Stroke – 17/16 x 1¼

Starter – Automatic Recoil

Transom Adjustment – Finger Control - 4 Position

Controls – Slide Lever for High & Low Operation

Steering – 120° Turn Manual

Carburetion – One Barrel-Float, Idle & High Speed Adjustment

Bearings (Engine) – Thrust Type Ball Bearing P.T.O. End, Special Roller Bearing Flywheel End

Connecting Rod – Forged Alloy Steel


Propeller Type – 2 Blade, Aluminum, Semi-weedless

Cooling and Muffling – Underwater Exhaust

Weight – 14 Lbs.

Shipping Weight – 19 Lbs.

CLINTON accessories

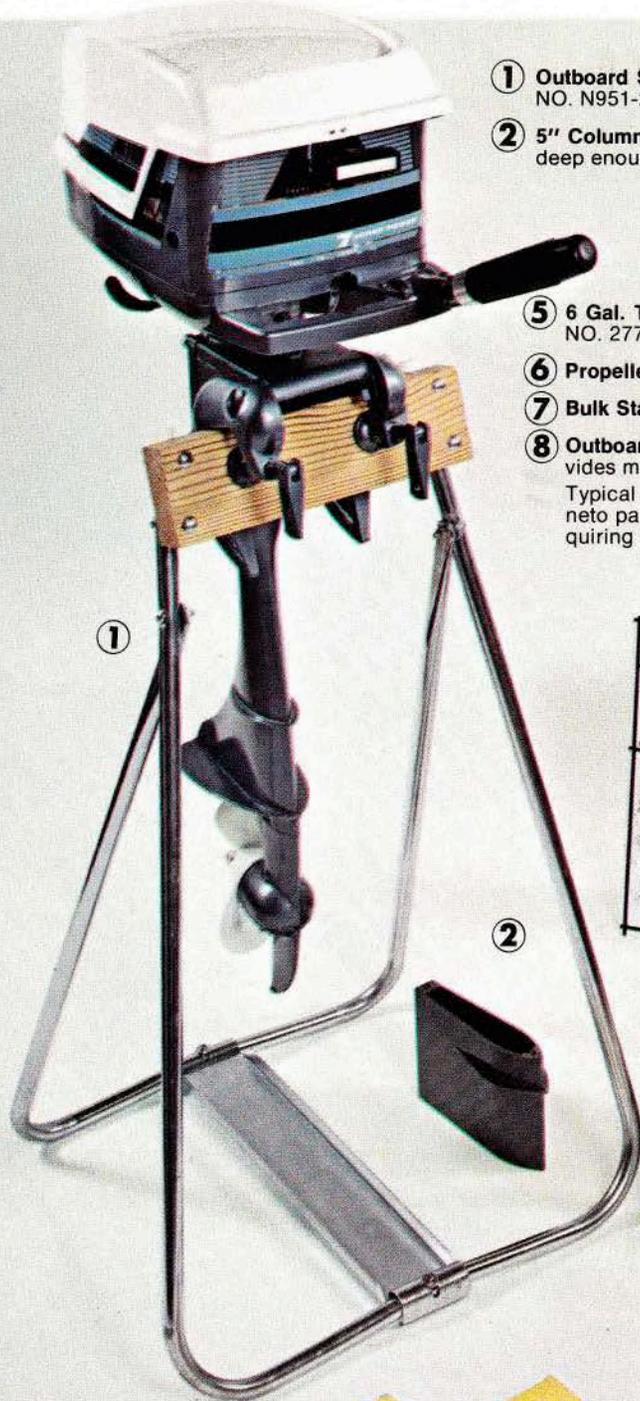

- 1 **Outboard Stand** Convenient, lightweight but strong metal storage stand at nominal cost. PART NO. N951-239
- 2 **5" Column-Extension Kit** Available only on K-350-4000, K-500-4000. Keeps propeller immersed deep enough for full thrust and maximum power. PART NO. K124-174
- 3 **Insurance For Good Boating** 203-166 Shear Pins (5); 203-165 Cotter Key (5); 183-209 Prop Nut (1)
- 4 **Fuel Line (50')** 50' Roll. Rugged — Extremely Flexible. Handy Measuring Chart. Controls and reduces inventory. PART NO. 158-420
- 5 **6 Gal. Tank** (Pictured with optional hose) order PART NO. P220-521-500. Tank Hose PART NO. 277-521-500.
- 6 **Propellers** Standard PART NO. 217-1-500; Heavy Duty Propeller-Bronze PART NO. K217-4
- 7 **Bulk Starter Rope** 150' Roll. Hi-Tensile Strength Fray Proof Nylon. PART NO. 246-38
- 8 **Outboard Gear Grease** (Std. Pkg. 12) Specially compounded aluminum complex grease provides maximum water wash-off resistance.

Typical usage examples include: outboard and inboard gear assemblies, throttle linkages, mag-neto parts, on boat trailers, wheel bearings, trailer hitches, also multipurpose applications requiring water and corrosion resistance. PART NO. K 951-247



ONE YEAR LIMITED WARRANTY

For one year from purchase, Clinton Engines Corporation, will replace for the original purchasers, free of charge, any part or parts, found upon examination by any factory authorized service account, or by factory at Maquoketa, Iowa, to be defective in material or workmanship or both. All transportation charges on parts submitted for replacement under this warranty must be borne by purchaser. There is no other express warranty. Implied warranties, including those of merchantability and fitness for a particular purpose, are limited to one year from purchase and to the extent permitted by law any and all implied warranties are excluded. This is the exclusive remedy and liability for consequential damages under any and all warranties are excluded to the extent exclusion is permitted by law.



CLINTON ENGINES CORPORATION
Maquoketa, Iowa 52060 (319) 652-2411

Manufacturers of air-cooled engines, chainsaws, outboard motors

Complete Unit Service
At Over 12,000 Authorized
Service Stations

Clinton

CLINTON ENGINES CORPORATION

MARINE ACCESSORIES

203-166 Shear Pins (5)

203-165 Cotter Key (5)

183-209 Prop Nut (1)

KIT PART NO. 203-259-500



Outboard Gear Grease

(Std. Pkg. 12)

Specially compounded aluminum complex grease provides maximum water wash-off resistance.


PART NO. K951-247



TYPICAL USAGE EXAMPLES

Outboard and Inboard gear assemblies, throttle linkages, magneto parts, on boat trailers, wheel bearings, trailer hitches, also multi-purpose applications requiring water and corrosion resistance.

5" Column-Extension Kit




For all boats and transoms measuring more than 15" from keel to the top of transom. Keeps propeller emerged deep enough for full thrust and maximum power.

PART NO. K124-174

Propeller-Standard

PART NO. 217-1-500



Propeller-Bronze

PART NO. K217-4

Bulk Starter Rope



PART NO. P246-38

150' Roll.
Hi-Tensile Strength
Fray Proof Nylon.


Fuel Line (50')



PART NO. 158-420

50' Roll.
Rugged - Extremely Flexible
Handy Measuring Chart.
Controls and reduces inventory.

Primer Pump & Line Assy.

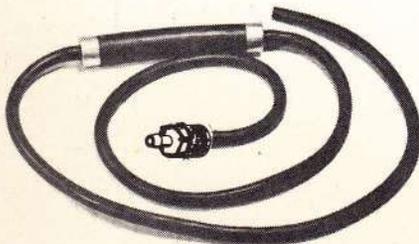

PART NO. P220-182-500

6 Gal. Tank



PART NO. P277-521-500

Outboard Stand



Convenient, lightweight but strong metal storage stand at nominal cost.

PART NO. N951-239

CLINTON ENGINES CORPORATION • MAQUOKETA, IOWA



Effective: February 1, 1975

CLINTON MARINE ACCESSORIES

PRICE LIST

<u>PART NUMBER</u>	<u>DESCRIPTION</u>	<u>LIST PRICE</u>	<u>DEALER NET PRICE</u>
K-951-247	Outboard Gear Grease (Std. Pkg. 12)	\$15.00	\$11.25
P-246-38	Bulk Starter Rope (150' Roll)	\$16.85	\$10.11
158-420	Fuel Line (50')	\$24.20	\$14.52
217-1-500	Propeller-Std.	\$11.30	\$ 6.78
K-217-4	Propeller-Bronze	\$24.85	\$18.64
N-951-239	Outboard Stand	\$ 8.85	\$ 8.85
203-259-500	Shear Pin Kit (Std. Pkg. 10 on display board)	\$24.50	\$14.70
277-521-500	6 Gal. Tank Assy	\$29.90	\$17.94
P-220-137-500	Primer Pump & Line Assy	\$11.95	\$ 7.17
K-124-174	Column-Extension Kit 5" Extension	\$34.20	\$25.65

Prices and Specifications Subject to Change Without Notice

CLINTON ENGINES CORPORATION

Form No. OB-2267

Maquoketa, Iowa 52060

Printed in U.S.A.

(Confidential)



Issued August 1, 1975)

ADVANCE 1976 OUTBOARD PROGRAM

COMPACTS

MODEL NO.	DESCRIPTION	SUGGESTED RETAIL PRICE LIST
K-150	1.5 H.P. with Integral Fuel Tank	\$159.40
K-350	3.5 H.P. with Integral Fuel Tank	\$182.75
K-751	7.5 H.P. with Integral Fuel Tank and provision for Remote Hook Up. Gear shift, Forward-Neutral	\$241.75

DELUXE

K-500	5 H.P. with 2½ gallon Remote Fuel Tank, Twist Grip Throttle Control	\$255.10
K-550	5.5 H.P. with 2½ gallon Remote Fuel Tank, Forward-Neutral, 1976 Features	\$302.30
K-752	7.5 H.P. with 3¼ gallon Remote Fuel Tank, 1976 Features	\$317.00
K-753	7.5 H.P. with 6 gallon Remote Fuel Tank, Forward-Neutral-Reverse, 1976 Features	\$376.40
K-990	9.9 H.P. with 6 gallon Remote Fuel Tank, Forward-Neutral-Reverse, Twist Grip Throttle Control	\$495.40

SHIPPED: F.O.B. Maquoketa, Iowa

TERMS: Net -- 30 Days

Prices and Specifications Subject to Change Without Notice.

There are no warranties which extend beyond the product description excepting only that each product sold hereunder is warranted as follows:

LIMITED ONE YEAR WARRANTY

For one year from purchase, Clinton Engines Corporation, will replace for the original purchasers, free of charge, any part or parts, found upon examination by any factory authorized service account, or by factory at Maquoketa, Iowa to be defective in material or workmanship or both all transportation charges on parts submitted for replacement under this warranty must be borne by purchaser.


There is no other express warranty.

Implied warranties, including those of merchantability and fitness for a particular purpose, are limited to one year from purchase and to the extent permitted by law any and all implied warranties are excluded. This is the exclusive remedy and liability for consequential damages under any and all warranties are excluded to the extent exclusion is permitted by law.

CLINTON ENGINES CORPORATION
Maquoketa, Iowa 52060

Form No. OB-2294

Printed in U.S.A.

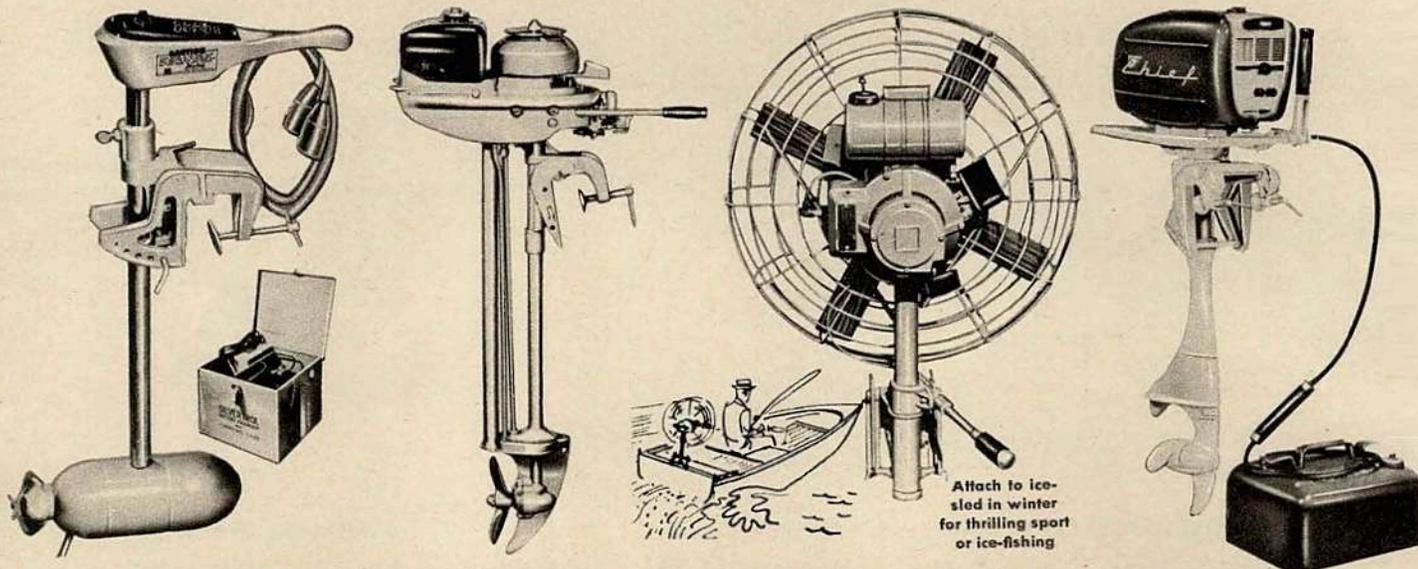


Lightweight Motors—Ideal for Fishing and Trolling

SILVERTROL ELECTRIC OUTBOARD. Fisherman's favorite, because it's noiseless, easy to carry, simple to operate. Up to 2½ mph on standard 12-volt heavy duty auto battery... higher speeds on 18v or 24v. Thumb screw tightens for fixed steering. You get pushbutton control of 4 speeds, 360° steering, full reverse, instant starts. Lifetime-lubricated motor runs 8 to 12 hours on one battery charging. 26 lbs. 81-05-31 C7450 Motor... \$99.50 Battery Charger and Carrying Case... for 6v or 12v battery (not incl.). 81-05-49 C2590 Charger, Case... \$34.50


NEPTUNE "MIGHTY MITE" OUTBOARD Weighs just 17 lbs. . . but it's a pint-sized powerhouse! Hitch it on your dinghy, canoe or sailboat . . . it starts instantly, runs quiet and smooth at trolling speeds, yet has plenty of power at full throttle. Has 1.7 HP motor, 2 port single cylinder. Moisture-proof magneto, centrifugal pump, siphon cooling, underwater exhaust, 1-qt. gas tank. Easy to operate. Length 33½", width 6½", stern height 15". Good for years of rugged service. Unusual value! 81-00-28 C7075 Neptune Motor. \$94.95

AIRBOY AIRDRIVE OUTBOARD MOTOR . . . takes you anywhere your boat will float. "Turbo-Thrust," 4-blade propeller develops extra power, allows dual mounting on 36" transom. Twist-grip throttle, Silent-Sonic muffler, vibration-resistant rubber mounts, 360° steering range, adjustable transom angle. Automatic recoil starter. Operates on 2 qts. gas and oil mixture at full speed for 1 hour. 26" propeller, 28" guard. 81-17-11 C19125 5 HP; 56 lbs. \$239.00 81-17-37 C14375 2 HP; 2-blade, 26" prop., 28" grd. 38 lbs. . . . \$179.50

CLINTON "CHIEF" 5 HP OUTBOARD Delivers full 5 HP, yet weighs only 30 lbs.! Ideal for fishing, trolling or cruising . . . for auxiliary power on sailboats . . . perfect second motor on larger boats. Air-cooled, quick-starting Clinton engine system won't clog, corrode, freeze up—salt water can't damage it. Motor-head swivels 360° for forward and reverse. Master control panel puts every operation within an easy hand-span. Remote 3 gallon fuel tank for hours of cruising. Extra smooth and quiet operating. 81-14-06 C10750 Clinton . . . \$169.95

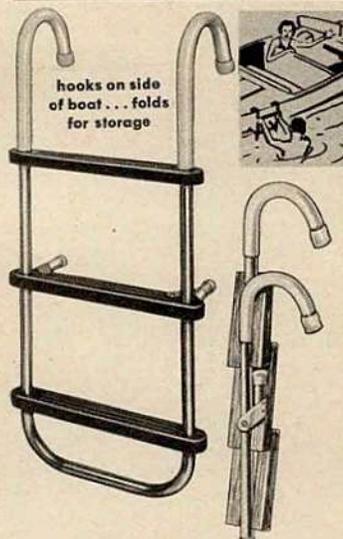

FOLDING BOARDING LADDER. All aboard the safe way! This compact folding ladder prevents dangerous slips and slides . . . helps to prevent capsizing. Everyone aboard? Lift the ladder in, fold it in one easy operation and store it until you're ready to use it again. You're off on your cruise or fishing excursion in less time . . . with less chance of accidents. The solid mahogany steps are a comfortable 2¼" wide. They're deeply traction-grooved for surer footing . . . heavily varnished to resist scrapes and scratches. Tough, one-inch tubular aluminum is lightweight, yet sturdy as iron. Won't rust or damage easily. Large 7-inch hooks fit most any boat . . . are covered with white vinyl to prevent slipping . . . won't mar side of boat. Folds flat for compact, easy storage. 81-06-63 C717 Ladder, 3-step... \$11.95 80-96-40 C847 Ladder, 4-step... 13.95

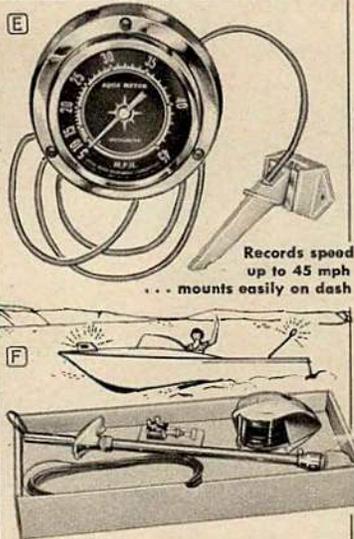

E AQUA METER SPEEDOMETER. The famous "Outboarder" . . . all-time favorite! Easy-to-read 3" dial with red needle registers speeds up to 45 mph. Surface mount has rust-resistant chrome case; concealed tubing with 3 screw holes for easy mounting. Unbreakable crown crystal. Complete with tube assembly kit, including a non-fouling Aqua-Matic impact tube. 80-99-05 B777 Aqua-Meter Kit. \$12.95

F BOAT LIGHT KIT. Here's a complete set for installing running lights on class A or Class 1 boats up to 26 feet long. All metal parts are triple-chromed, die cast Zamac for longer, rustproof wear. Includes 12v bow light, 30" stern light, push-pull switch, cable, pigtailed screws. Meets all State and Coast Guard regulations. Install it on your boat for safety and good looks! 81-04-65 B1197 Boat Light Kit. \$19.95




G PANORAMIQUE WIDE ANGLE MASK from France. Tempered safety glass angled to eyes for wider vision. Contour strap, pliable rubber guard. 81-00-36 B298 Panoramic mask. \$4.95

GARIBALDI CRESSI RONDINE SWIM FINs (not shown). Contoured, closed heel and open toe. Bright yellow. 81-00-02 B657 Size 5-7 shoe... \$10.95 81-01-19 B717 Size 7-9 shoe... 11.95 81-01-27 B717 Size 9-11 shoe... 11.95

H AQUA METER MARINE CLOCK. Modern, massive styling in a precision timepiece gives a salty, "sea-going" look to your outboard. Triple chrome-plated case resists all the elements. 3" dial gives 12 and 24-hour readings. Front set and wind. Watertight construction for years of trouble-free accuracy. Surface mount. Matches Aqua-Meter Speedometer. 81-04-81 B957 Marine Clock... \$15.95



TA-PAT-CO FIRE EXTINGUISHERS. Be safe, not sorry! Equip your boat with a portable marine fire extinguisher now, before an emergency arises. Protect yourself as well as your passengers . . . save your boat from costly fire damage. These pressurized, dry-chemical-type models manufactured by Ta-Pat-Co are approved by the U.S. Coast Guard for use on private boats. They're properly designed to give you many years of protection. Compact and lightweight . . . ready for use on a moment's notice. Chrome-plated tank carries easy-to-follow instructions for operation and maintenance of extinguisher. Complete with mounting brackets . . . easy to install. Your choice of two sizes. From Ohio. 80-96-81 D1650 Fire-Extinguisher, 2½ lb. size, Wt. 6 lbs. . . . \$26.50 80-96-99 D3250 Fire-Extinguisher, 5 lb. size, Wt. 11½ lbs. . . . \$53.00

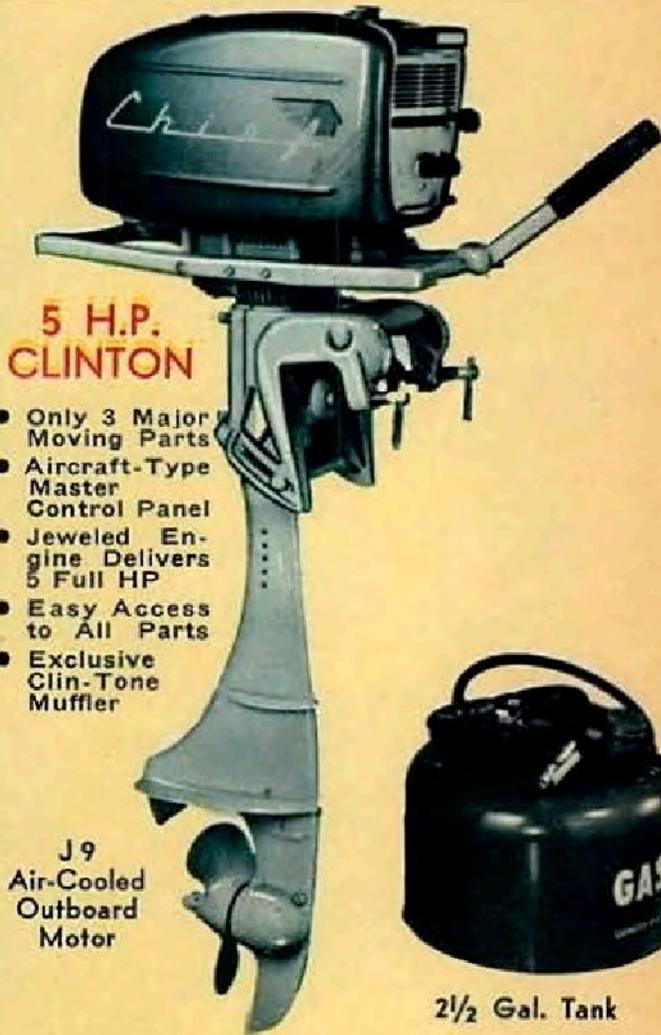

**5 H.P.
CLINTON**

- Only 3 Major Moving Parts
- Aircraft-Type Master Control Panel
- Jeweled Engine Delivers 5 Full HP
- Easy Access to All Parts
- Exclusive Clin-Tone Muffler

J9
Air-Cooled
Outboard
Motor

2½ Gal. Tank



**5 H.P.
CLINTON**

- Only 3 Major Moving Parts
- Aircraft-Type Master Control Panel
- Jeweled Engine Delivers 5 Full HP
- Easy Access to All Parts
- Exclusive Clin-Tone Muffler

J9
Air-Cooled
Outboard
Motor

2½ Gal. Tank

5 H.P. Clinton Air Cooled Outboard Motor

3681A10313—Features: snap-off hood for easy access to engine, cooling fins; handles for easy carrying; motor head swivels 360° for forward and reverse; automotive type carburetor; 2-bladed, semi-weedless propeller; 5-foot neoprene fuel hose; automatic recoil starter; folding steering arm; aircraft-type throttle and choke controls; built-in automotive-type fuel pump; needle and sleeve bearings resist friction wear; remote 2½-gallon fuel tank and die cast aluminum crankcase. Ship. wt. approx. 36 lbs. **Retail \$134.25**

3681A9750—5 HP Air Cooled Outboard Motor. Features: snap-off hood for easy access to engine, cooling fins; handles for easy carrying; motor head swivels 360° for forward and reverse; automotive type carburetor; 2-bladed, semi-weedless propeller; 5-foot neoprene fuel hose; automatic recoil starter; folding steering arm; aircraft-type throttle and choke controls; built-in automotive-type fuel pump; needle and sleeve bearings resist friction wear; remote 2½-gallon fuel tank and die cast aluminum crankcase. Ship. wt. approx. 36 lbs. **Retail \$134.25**

CLINTON JET AGE OUTBOARDS

Runs in or out of water.
25% lighter than other models.



An outboard anyone can afford. Quick starting. Lightweight. Quiet running with "cancelled tone" muffler. Easy to handle. Five models available. 2½ to 5½ hp. performance. Air cooled. No water pump to corrode or freeze up. Prices FOB Clinton, Michigan. **\$99.95** start at...



SERVICE EVERYWHERE

For friendly factory authorized neighborhood service, Clinton should be your preferred choice. Over 6,000 Clinton Service Centers are located from coast to coast. For free gasoline engine inspection, see your local Clinton Service Center. No obligation.



LOOK FOR IT IN THE YELLOW PAGES

Look for the mark of quick starting Clinton Gasoline Engines and factory authorized Clinton Service in the yellow pages of your local telephone directory, under Engines Gasoline, Gasoline Engines, Engines Gas or Engines. Look for the Clinton Arrowhead.

FREE ENGINE INSPECTION at all CLINTON SERVICE CENTERS

Clinton Machine Company • Maquoketa, Iowa

Please send me my FREE Arrowhead decal and more information on the equipment I have checked below. I am enclosing a stamped, self-addressed envelope.

FREE

- Clinton Gasoline Engines
- Clinton Jet Age Outboards
- Clinton Chainsaws
- Send me the name of my nearest Clinton Service Center.

Name.....
Address.....
City.....State.....



CLINTON MACHINE COMPANY 73-B

Engine Division, Maquoketa, Iowa • Chainsaw and Outboard Division, Clinton, Michigan